

# SlingerSafe

The fall protection system for the safety of the workforce when lorry loading

## Features

- Safety system for loading and unloading vehicles
- 6.2m self retracting lifeline complying to EN 360
- Built in shock absorber
- Adjustable feet for uneven ground

## Performance


- Full coverage of articulated vehicle using 2 units
- Conforms to EN 795B load testing
- Low friction swivel for ease of use

## Options

- Standard, with tabs for plywood base and sides for gravel ballast
- Concrete blocks, including forklift slots

Ambar Kelly

[www.ambar-kelly.com](http://www.ambar-kelly.com)

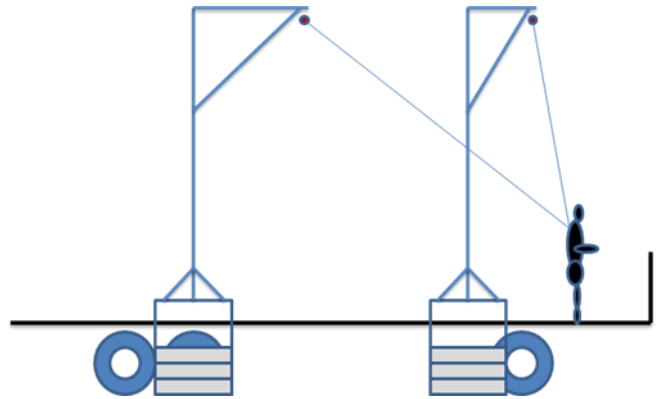

## Specification

For protection of operatives loading and unloading vehicles up to 6m in length use one SlingerSafe unit. Vehicles over 6m and up to 12m (articulated trailers) use two SlingerSafe units, both inertia reels need to be connected to operatives harness.

Supplied with 6.2m En 360 compliant, self retracting line with wire rope, suitable for use in vertical or horizontal planes. Incorporates spring clip to fit onto harness D ring

All to be manufactured and supplied by Ambar Kelly Limited, Annexe 1, Tinkers Green, Rabley Heath Road, Welwyn, Herts, AL6 9UB, United Kingdom Tel 07881 820761 and used in accordance with the manufacturer's instructions